


Hydraulic Breaker

TOP-205J / TOP-300J



TOP-J Series

Exhaustive Quality Control

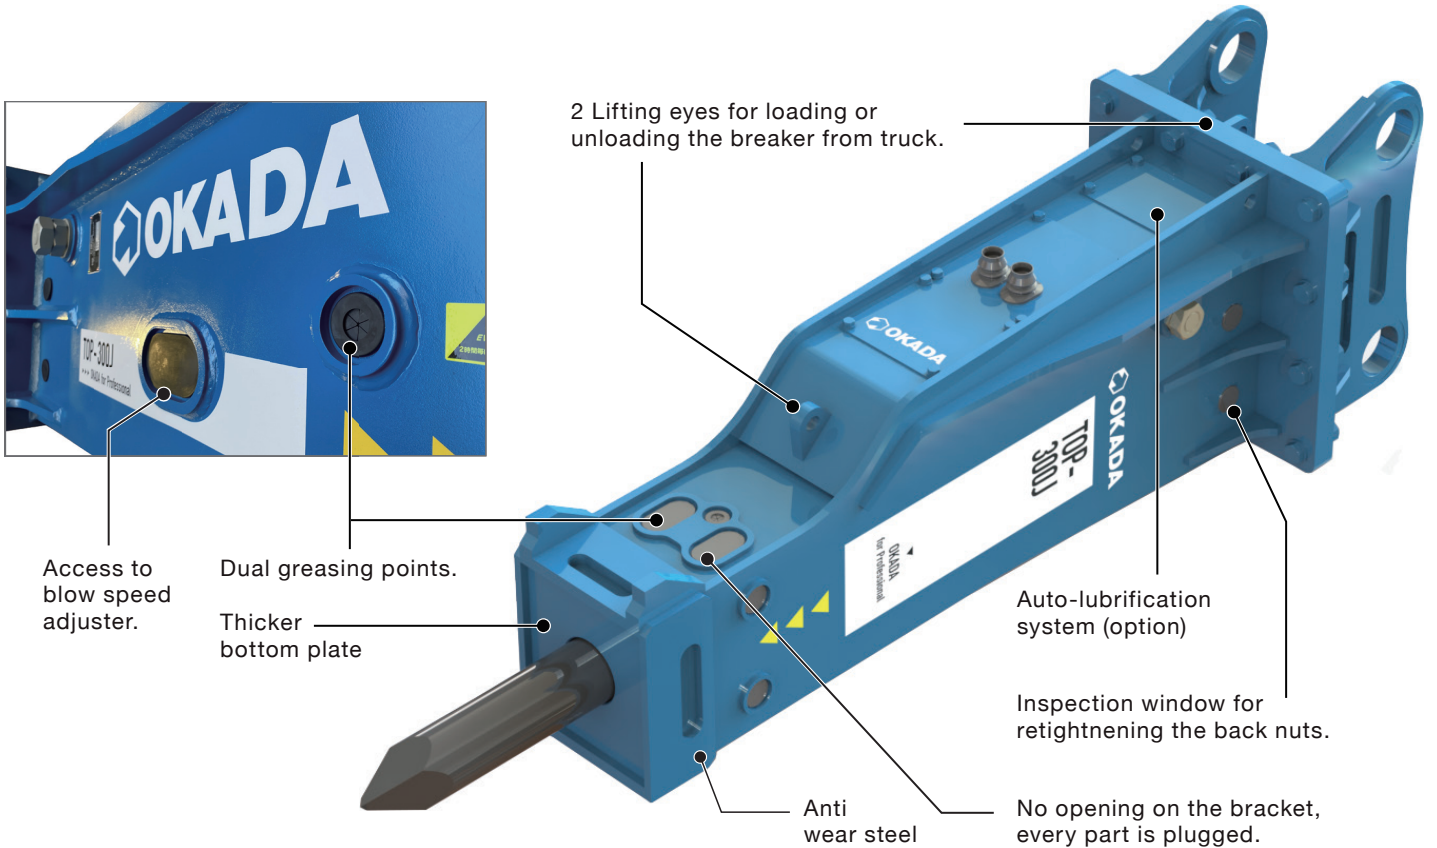

- 1. Anti-Blank Fire system
- 2. Anti-abrasion box style bracket design
- 3. Blow speed control adjuster
- 4. High pressure accumulator
- 5. Auto-lubrication system (option)



SPECIFICATIONS

	Unit	TOP-205J	TOP-300J
Working Pressure	MPa	15~18	16~18
Oil flow Consumption	L/min	110~135	160~190
Frequency	b.p.m.	L 360~430	L 370~420
		S 500~560	S 450~530
Operating Weight	kg	1780	2580
Overall Length	mm	2726	3035
Working Steel Dia.	mm	135	150
Carrier Machine Weight Range	ton	18~26	24~36
Carrier Output Flow Range	L/min	140~210	220~280

The specifications of breaker are subject to change without notice.
These numbers may be varied depending on the carrier machine condition and material.

OKADA AIYON CORPORATION

www.okada-aiyon.com

4-1-18, Kaigan-dori, Minato-ku, Osaka 552-0022, Japan
Tel +81-(0)6-6576-1268 Fax +81-(0)6-6576-1516
Email sales@aiyon.co.jp
facebook.com/okadaaiyon
youtube.com/OkadaAiyonCorp

